

150G/250G HEATED/INSULATED TACK TANK TRAILER



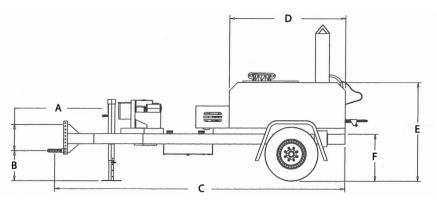



| Model | 150G | 250 G |
|----------------------------|--|--|
| Туре | 150 Gallon Heated/Insulated Emulsion Trailer with Spray System | 250 Gallon Heated/Insulated Emulsion Trailer with Spray System |
| Capacity | 150 gallons | 250 gallons |
| GVWR | 7,000 lbs | 7,000 lbs |
| Fuel Source | Diesel | Diesel |
| Fuel Capacity | 18 gallons | 18 gallons |
| Burner Type | (1) 105,000 BTU Beckett Diesel burner | (1) 105,000 BTU Beckett Diesel burner |
| Number of Burners | 1 | 1 |
| Α | 12" | 12" |
| В | 16.5" | 16.5" |
| С | 143" | 166" |
| D | 58.5" | 78.5" |
| E | 50" | 52" |
| F | 25" | 25" |
| G | 79" | 82" |
| Н | 40" | 40" |
| T | 48" | 48" |
| Construction | 1" blanket ceramic insulation | 1" blanket ceramic insulation |
| | 10 gauge inner and outer wall | 10 gauge inner and outer wall |
| | 10" diameter fill opening with lockable civacon lid | 10" diameter fill opening with lockable civacon lid |
| Axles | Single 7,000 lb double eye | Single 7,000 lb double eye |
| Tires | 16" | 16" |
| Brakes | Electric with safety breakaway | Electric with safety breakaway |
| Hitch | 3.0" pintle eye | 3.0" pintle eye |
| Paint | Blasted and painted with two coats of epoxy primer and urethane finish | Blasted and painted with two coats of epoxy primer and urethane finish |
| Frame | 2"x5"x1/4" structural rectangular tubing | 2"x5"x1/4" structural rectangular tubing |
| Base Model Options Include | 24"x24" clean out port | 24"x24" clean out port |
| | 50/550 thermometer | 50/550 thermometer |
| | Two LED 4"round red S/T/T light on rear (1 per side) | Two LED 4"round red S/T/T light on rear (1 per side) |
| | 12 v deep cycle battery | 12 v deep cycle battery |
| | VIP protection system | VIP protection system |
| | Spray System | Spray System |
| | Hose reel for spray system | Hose reel for spray system |
| | Battery charger package | Battery charger package |
| Warranty | Two year machine, Lifetime frame | Two year machine, Lifetime frame |
| | | |

Falcon Asphalt Repair Equipment

2600 W. Salzburg Rd. Freeland, MI 48623 sales@falconrme.com Phone: (989) 495-9332 Fax: (989) 495-9342 www.falconrme.com



150G/250G HEATED/INSULATED TACK TANK TRAILER

STANDARD:

- Battery charger package
- Automatic temperature control
- VIP technology
- 50/550 Thermometer
- Hose reel

- Insulated tank
- 12 volt deep cycle battery
- Conspicuity tape
- 24" x 24" clean out port

OPTIONS:

- Reversing pump
- 8-foot spray bar
- Skid mounted
- Trailer mounted
- Other customizable options available

Falcon Asphalt Repair Equipment recently unveiled their Falcon 150G and 250G tack tank trailers. The trailer- or skid-mounted diesel tack tanks are built with the same high quality as Falcon's various hot boxes and recyclers. The Falcon tack tanks are available in two sizes, the 150G (150 gallon tank) and the 250G (250 gallon tank), and include the following features: **Automatic thermostatically controlled heat system, stainless steel flue, diesel power, large clean-out port, an insulated tank.**

Falcon Asphalt Repair Equipment sells and supports a full line of asphalt hot boxes, recyclers and tack tanks worldwide providing solutions for pothole repairs and other damaged asphalt surfaces. All Falcon machines are built with pride in Midland, Michigan.



TACK TANK TRAILER

THE FALCON ADVANTAGE



SLIP IN MODEL



ASPHALT HOT BOX AND RECYCLER

Falcon Asphalt Repair Equipment 2600 W. Salzburg Rd. Freeland, MI 48623 sales@falconrme.com

Phone: (989) 495-9332 Fax: (989) 495-9342 www.falconrme.com

WWW.FALCONRME.COM